

META 500

The Meta 500 combines innovation with technology making it suitable for businesses and commercial buildings where it is intended for public use or wherever 500 kg rated load is required.

CABIN

- Range of skinplate colours
- Range of stainless steel, smooth or textured finishes
- Glass cabin walls*
- Choice of flooring, Granite, Linoleum, or customers own.
- Bespoke cabins available

DOORS

- **Sliding doors**
 - Prisma operator with DC drive and encoder
 - 2 panel, 3 panel and centre opening
 - Range of skinplate colours
 - Range of stainless steel, smooth or textured finishes
 - Glass doors
 - Fire rated
- **Swing Doors**
 - Solid door, vision panel door, full glass panel door
 - Full glass aluminium door
 - Range of RAL colours
 - Range of stainless steel, smooth or textured finishes
 - Frameless glass doors
 - Fire rated
- **Eco Bus Doors** (for use with swing doors for one touch operation)
 - Wide range of door panel finishes
 - Light, strong and reliable design
- Bespoke doors available

LIFT STRUCTURE

- Indoor or outdoor
- Powder coated steel, stainless steel or Aluminium
- Range of standard colours
- Bespoke RAL colours
- Cladding
 - Metal cladding
 - Externally beaded glass panels
 - External mounted glass with pin fixings
- Ladder frame option

STANDARD FEATURES

- LED energy saving Spot lights
- Emergency lowering and light in case of power cut
- Tactile and braille buttons with LED halo
- Hydro jack with rupture valve Locks EN 81 – EC Arrestor equipment
- Lock system with electronic control to allow safe access to pit
- Key selector in car or landings
- Handrails
- Mirror
- Display in car and landings (LED display with scrolling arrows)
- Voice synthesizer (Floor selection and direction)

SPECIFICATION


Conformity:	Machine directive 2006/42/ec, BS6440, EN81 – 41, DDA compliant
Car Size:	With swing doors - Min 700x1000, Max 1300x1600 or 1000x2000 With auto sliding doors - Min 700x1200, Max 1100x1800 Other sizes are available
Speed:	0.15 m/per second for CE, 0.3m/ per second non CE.
Power:	220v, single phase, 2kW star delta
Max Travel:	12m – unlimited stops
Rated Load:	6 people, 500kg
Shaft Types:	Existing pre-built or steel structure
Pit:	200mm
Headroom:	2.5m with sliding doors, 2.4m with swing doors
Configuration:	Single, through or adjacent
Controls:	One touch
Application:	Indoor or outdoor



*depending on cabin size and door options


META 500

- Shaft - Brick/Concrete**
- Cabin size - 1400mm x 900mm**
- Entry - Single**
- Doors - Auto sliding, 800mm**

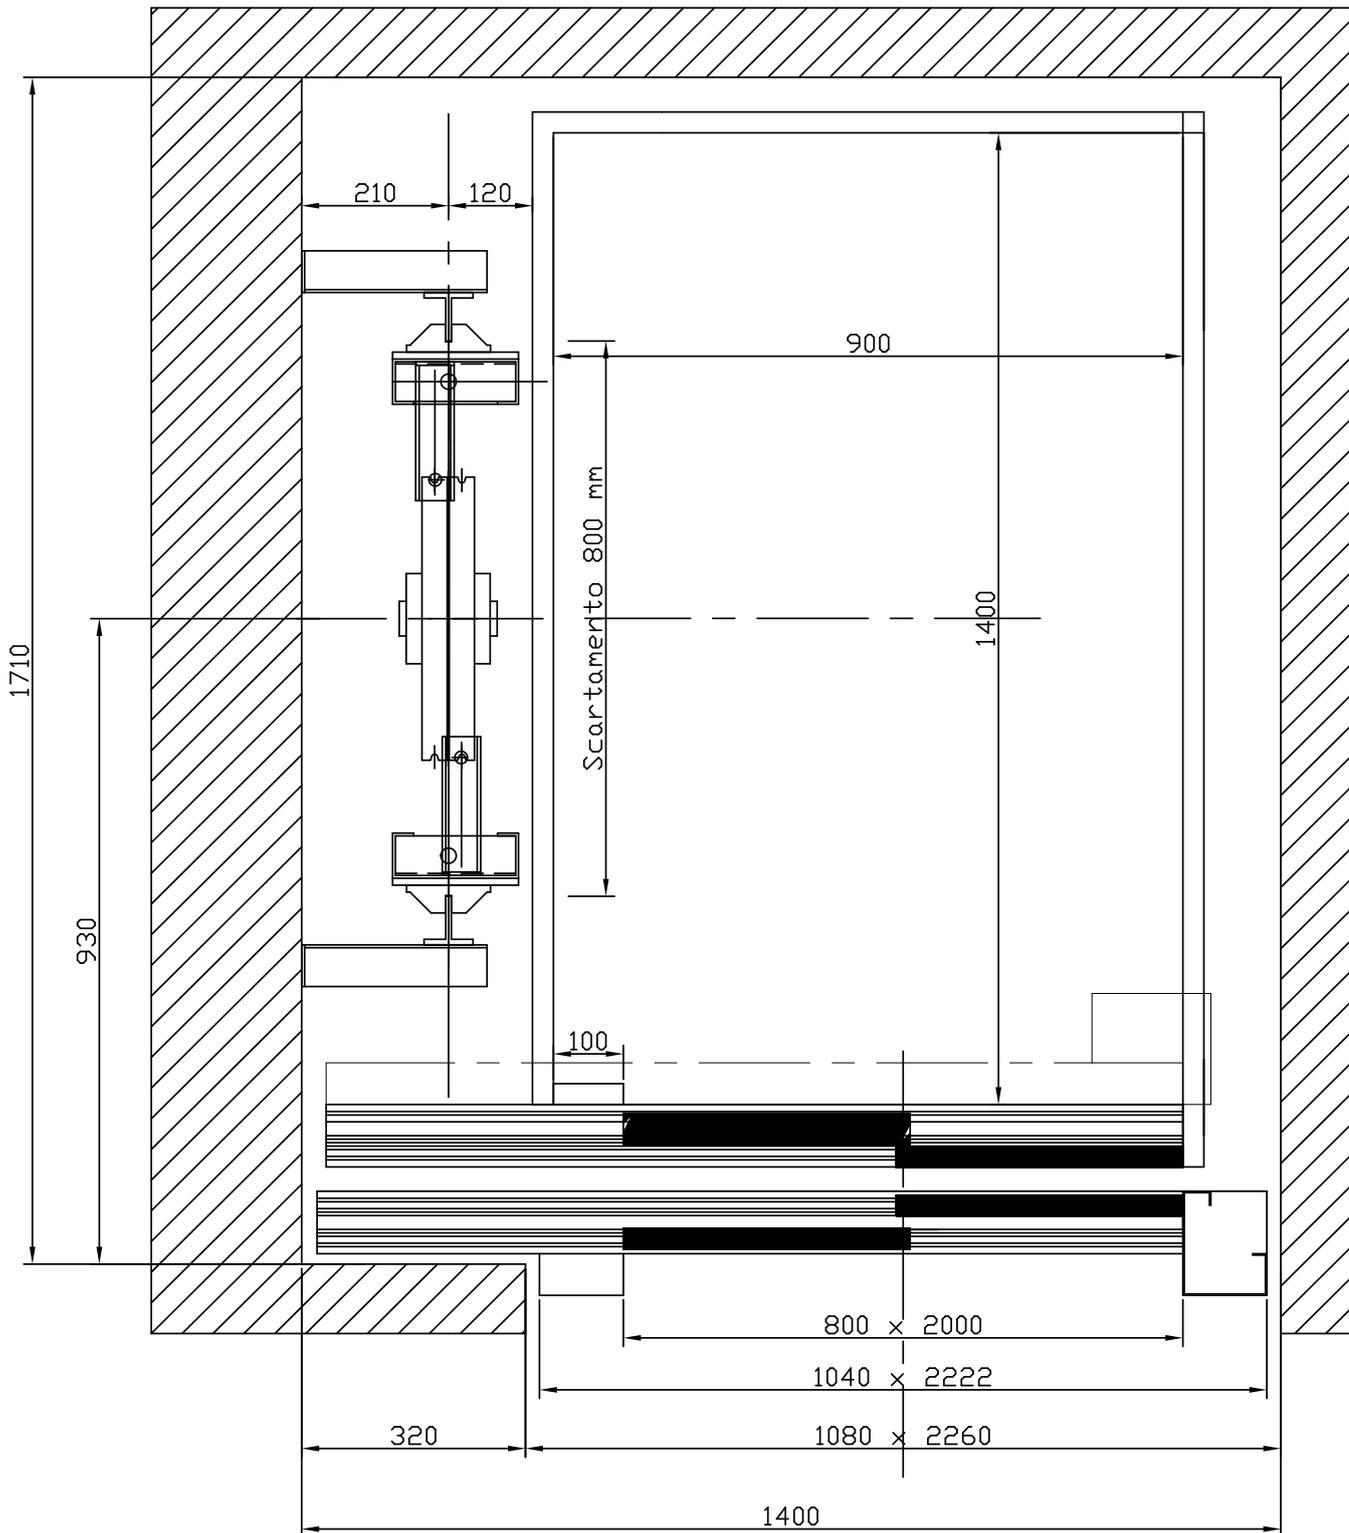


META 500

- Shaft - Steel Structure**
- Cabin size - 1400mm x 900mm**
- Entry - Single**
- Doors - Auto sliding, 800mm**

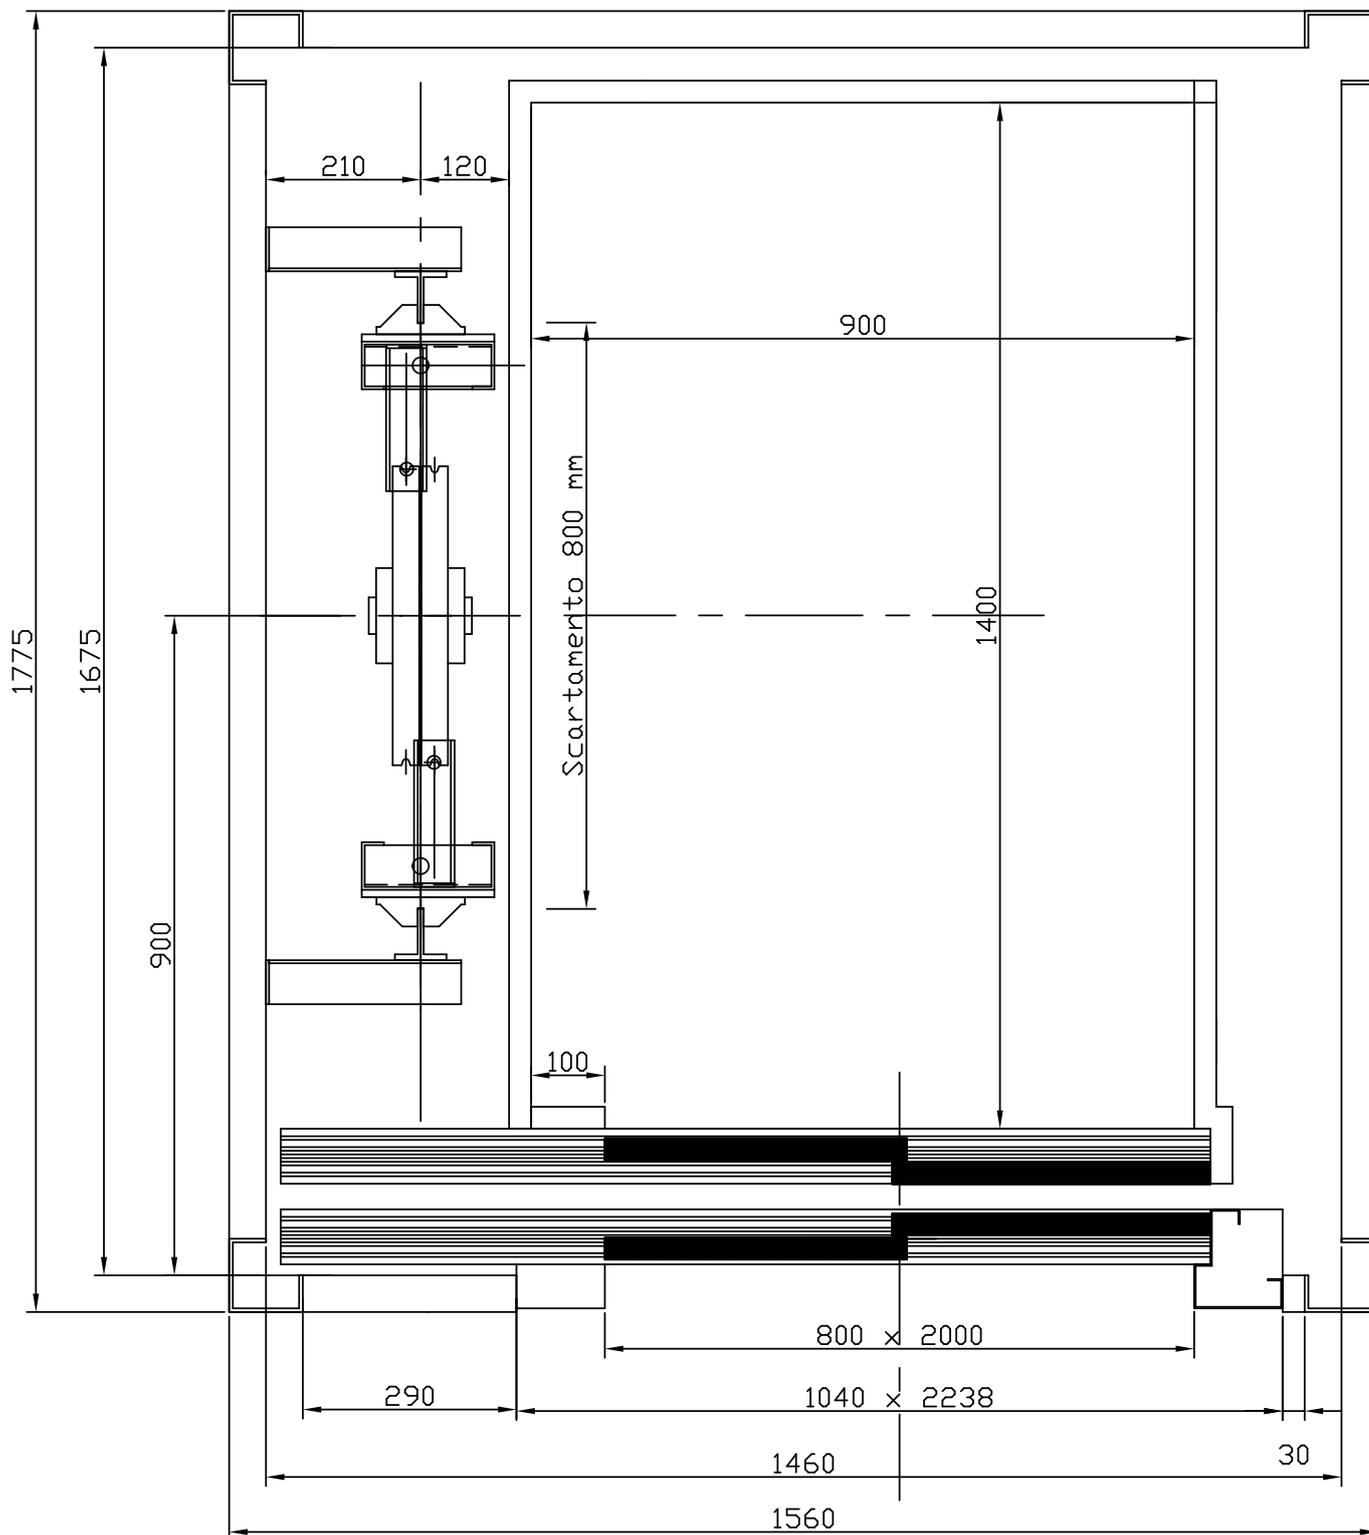

META 500

- Shaft -** Brick/Concrete
- Cabin size -** 1400mm x 1100mm
- Entry -** Adjacent
- Doors -** Auto sliding, 900mm

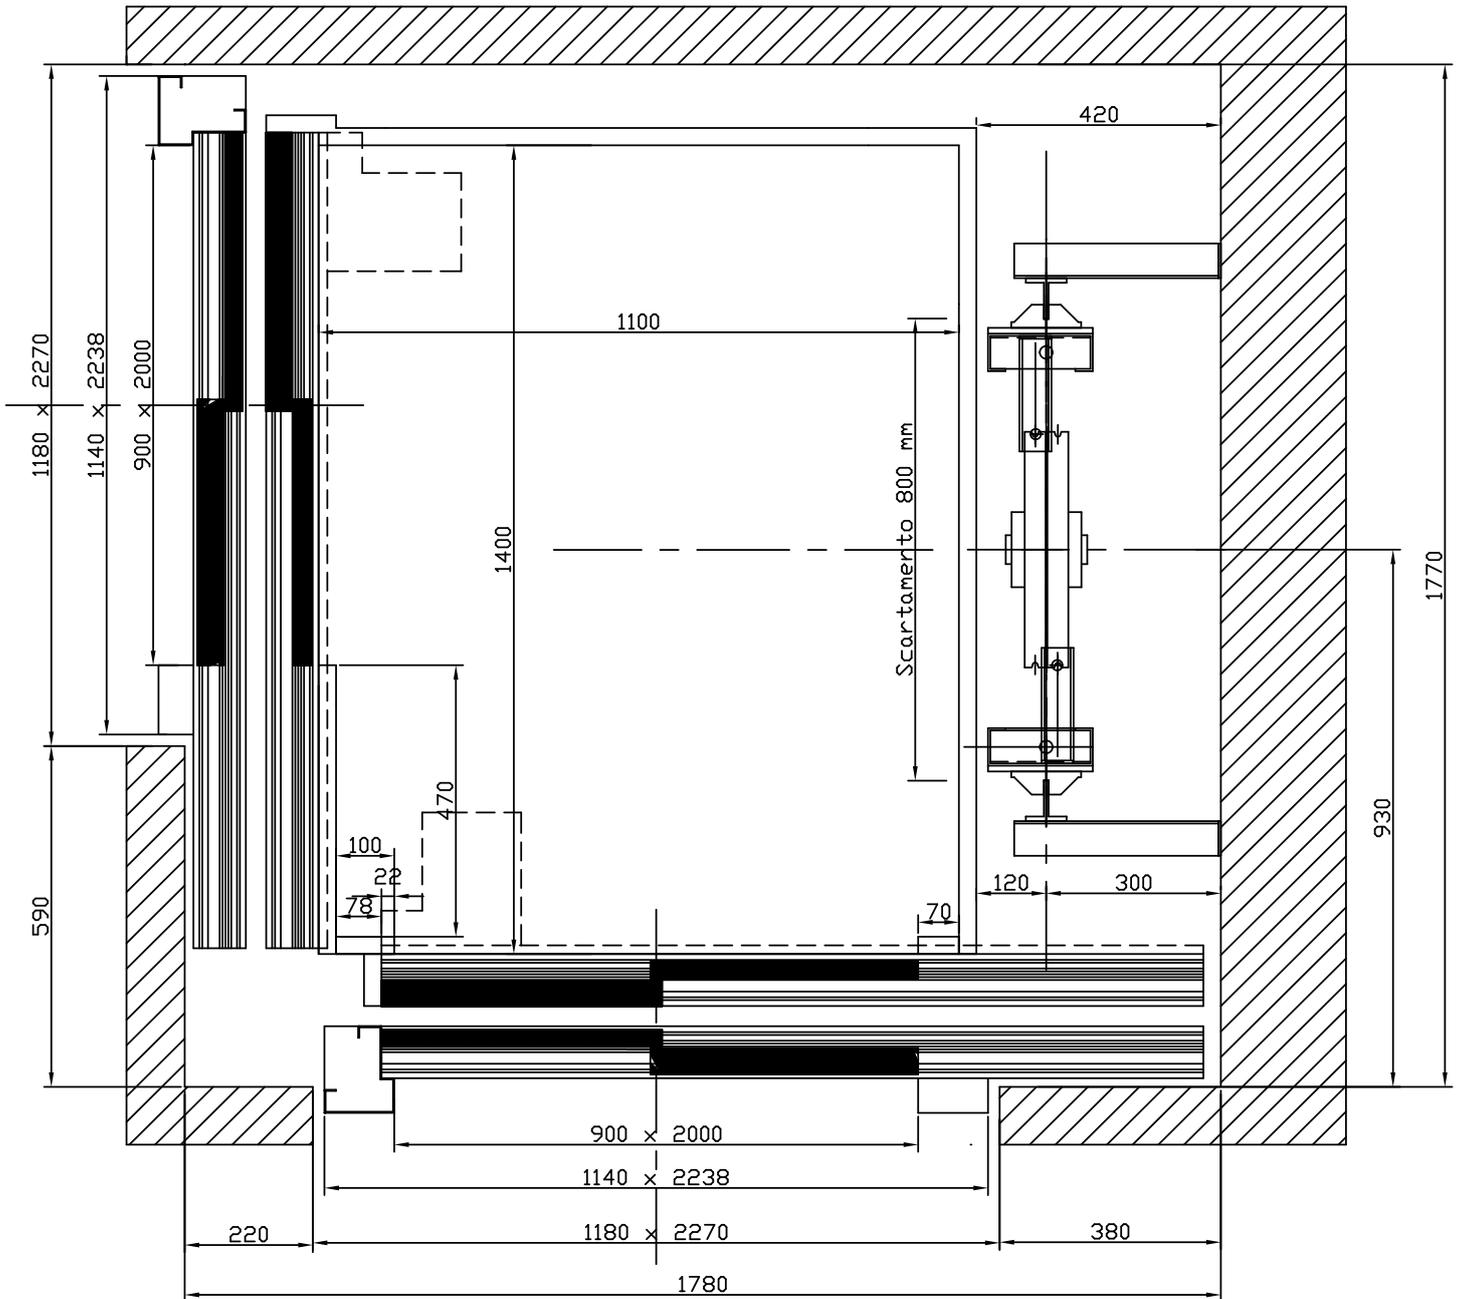

META 500

- Shaft - Steel Structure**
- Cabin size - 1400mm x 1100mm**
- Entry - Single**
- Doors - Auto sliding, 900mm**

